

1

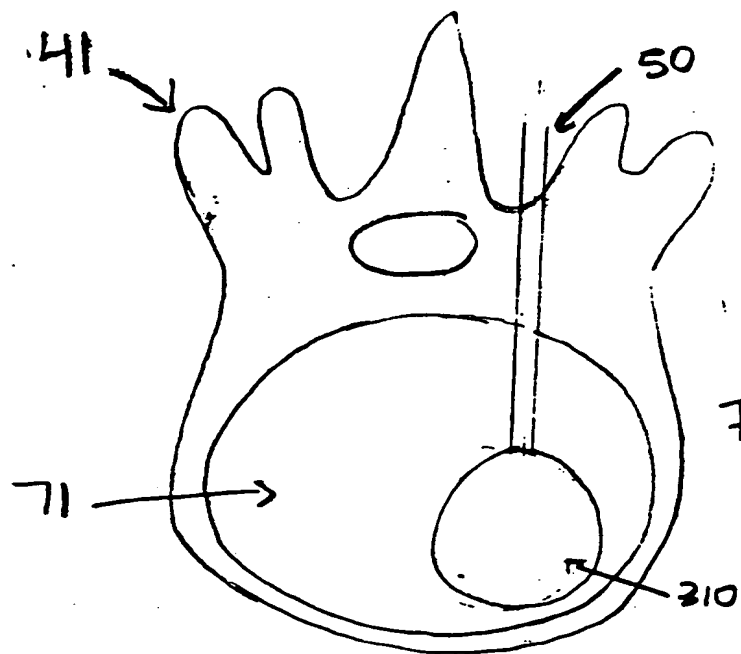


Fig. 1

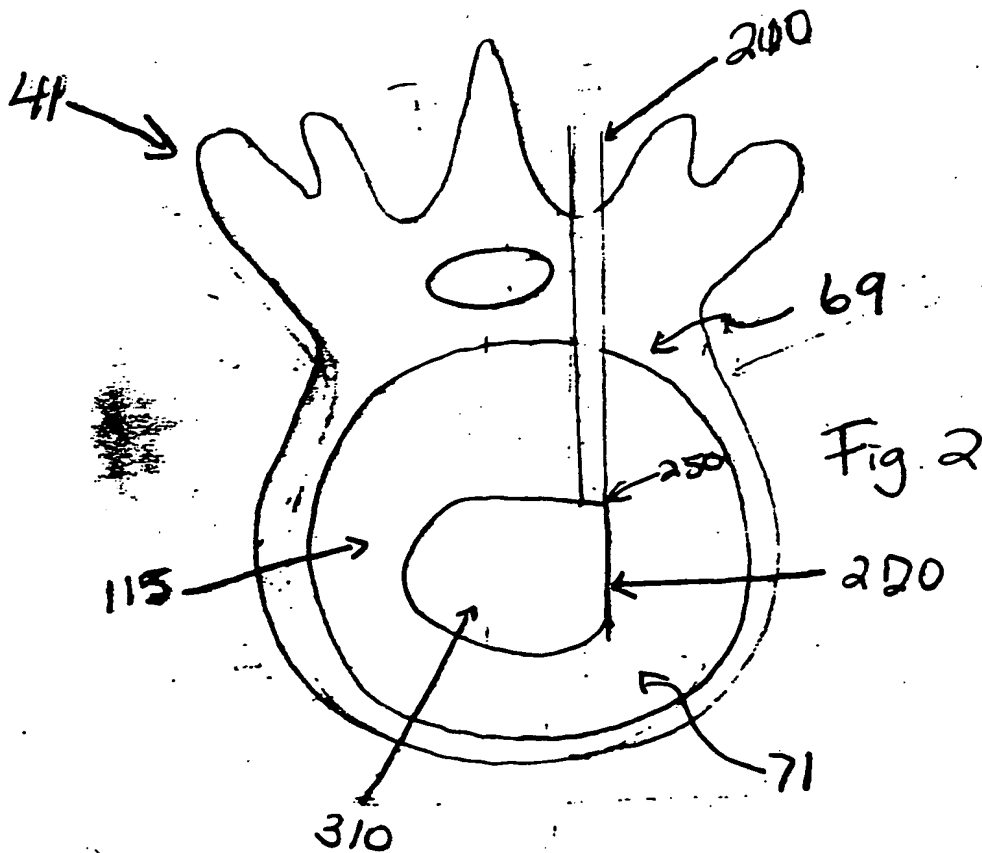
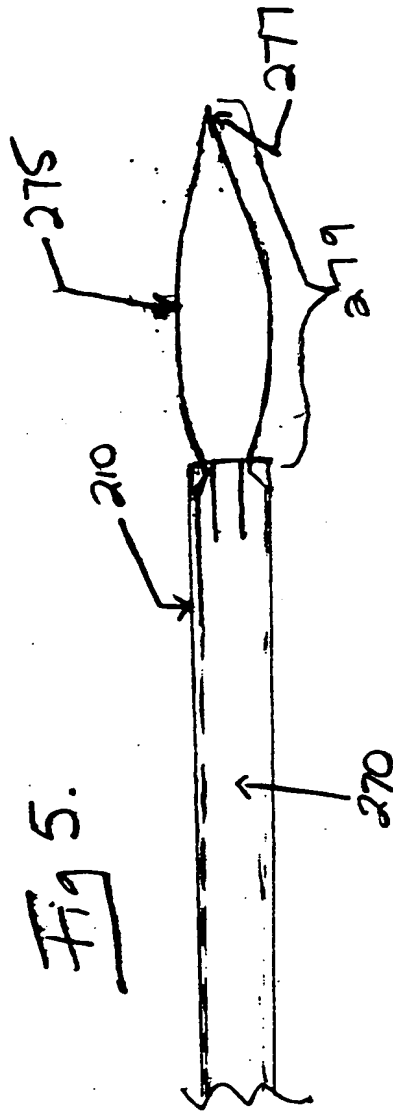
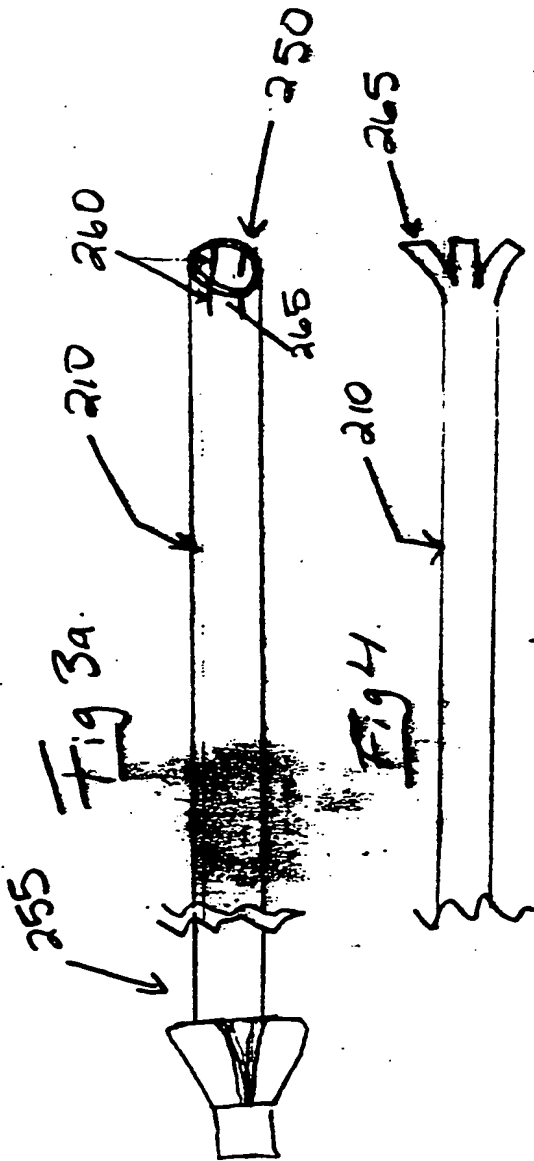


Fig. 2



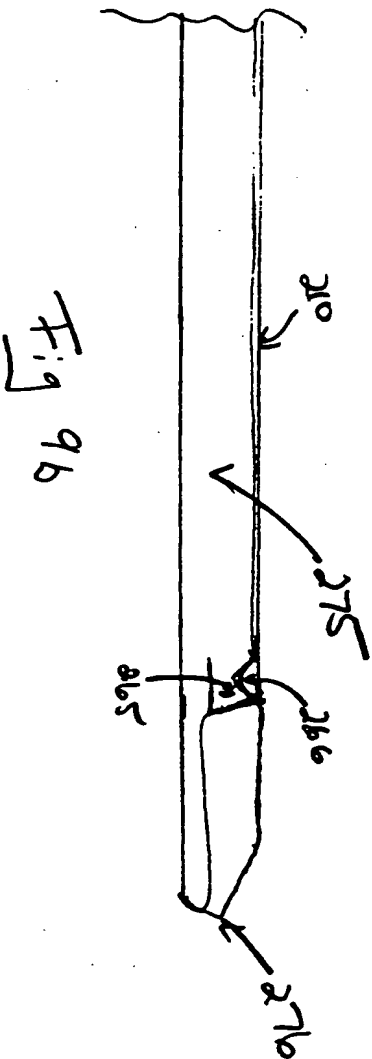



Fig. 7.

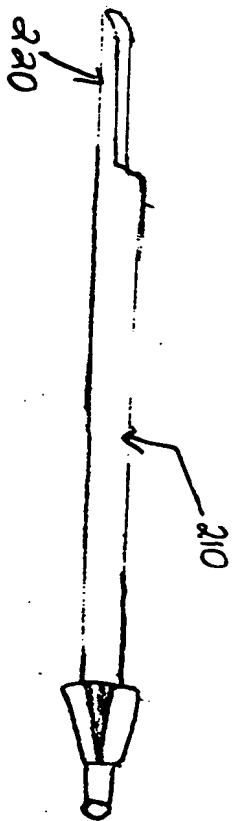


Fig. 9a

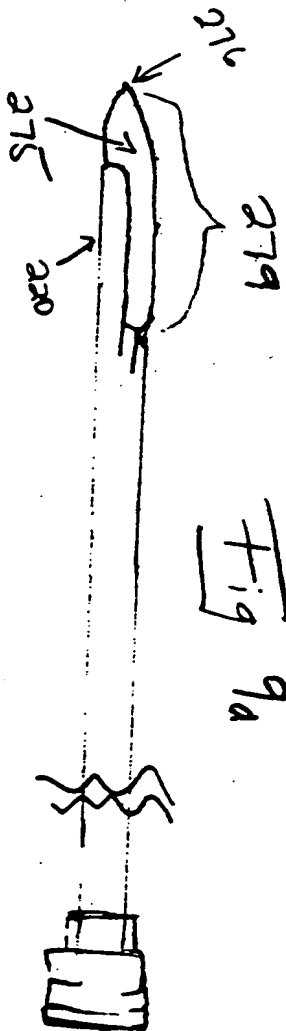


Fig. 10.




Fig. 11

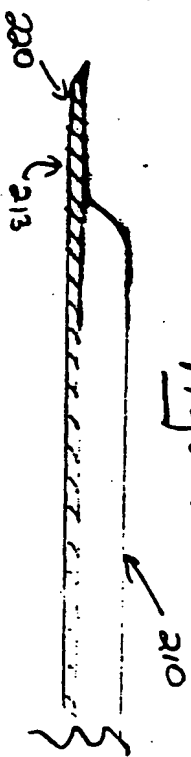


Fig. 12


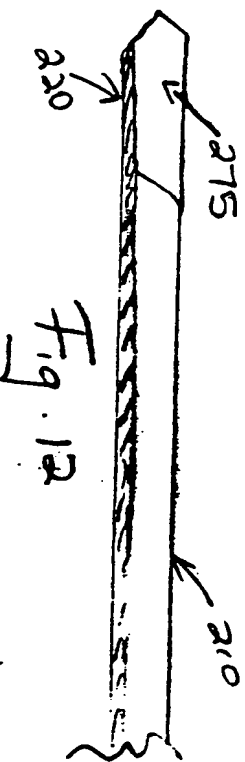


Fig. 13

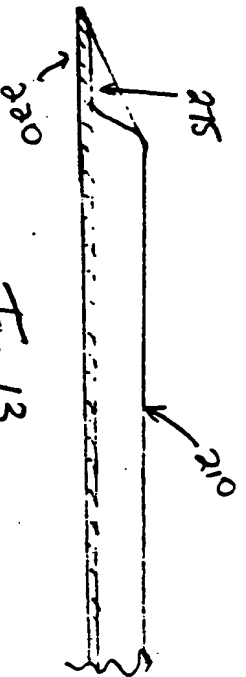

4

5

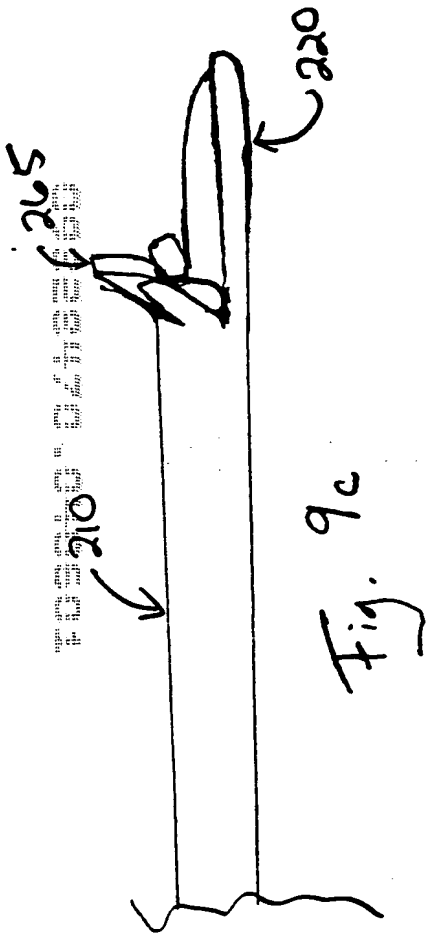
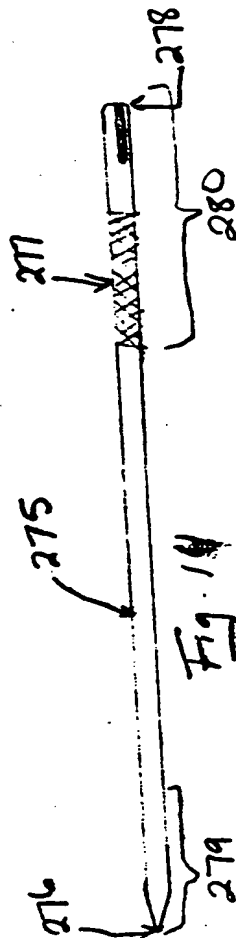
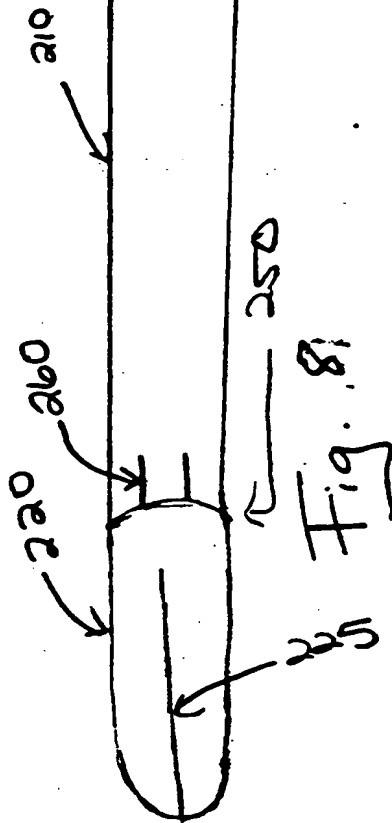


FIG. 8 is a side view of the device in accordance with the present invention, showing the device in a closed position. The device includes a handle 210, a body 220, and a tip 230. The handle 210 is connected to the body 220, and the body 220 is connected to the tip 230. The device is shown in a closed position, with the tip 230 retracted into the body 220.



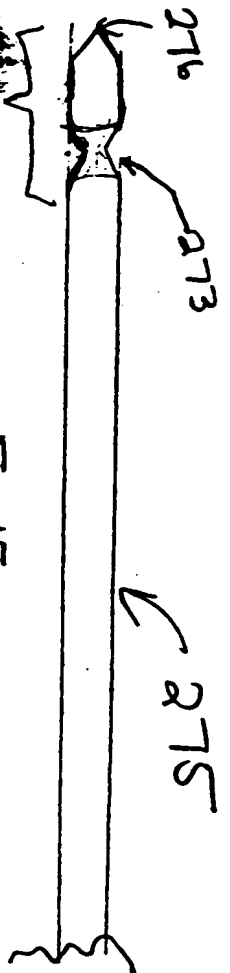


Fig. 15

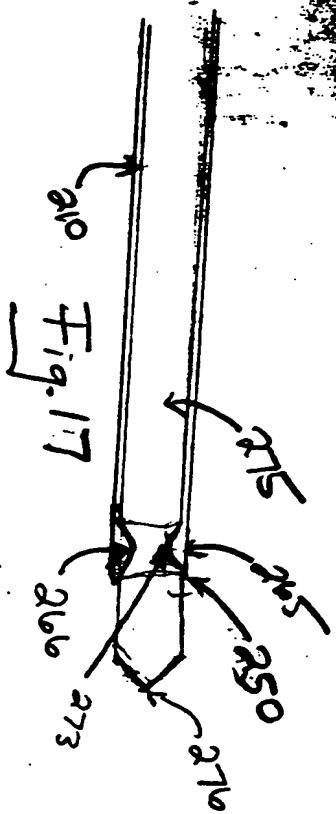


Fig. 17

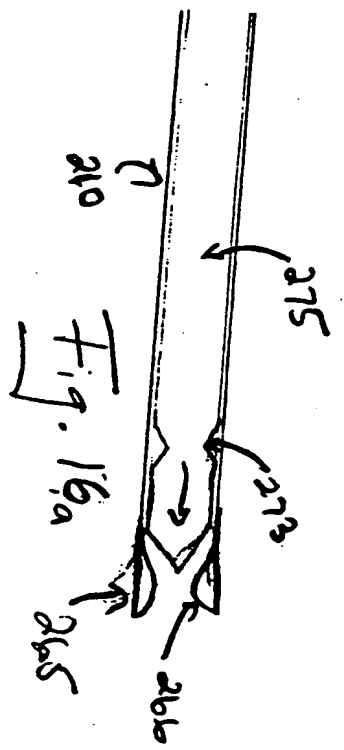


Fig. 16a

Fig. 18

8

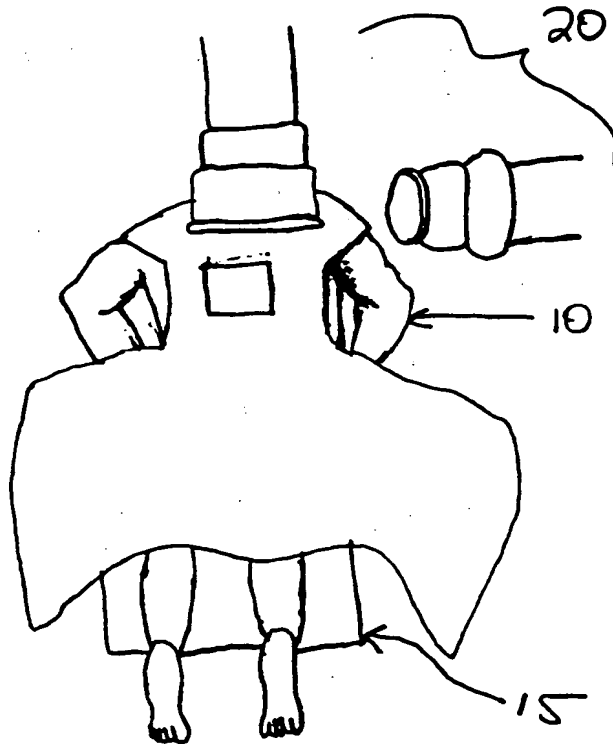
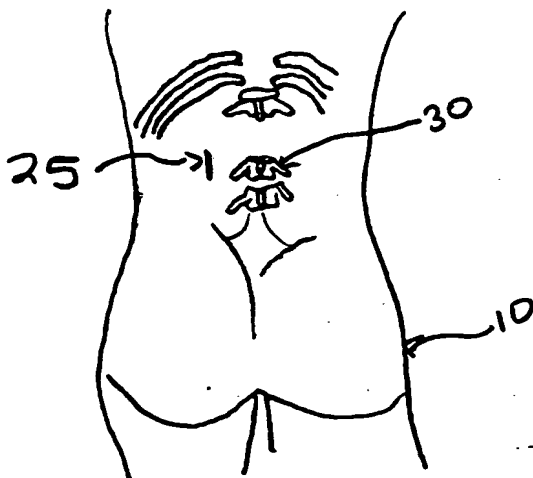


Fig. 19





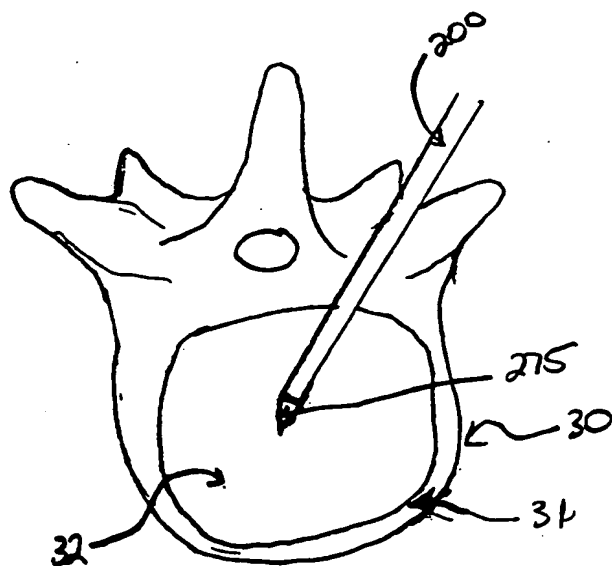
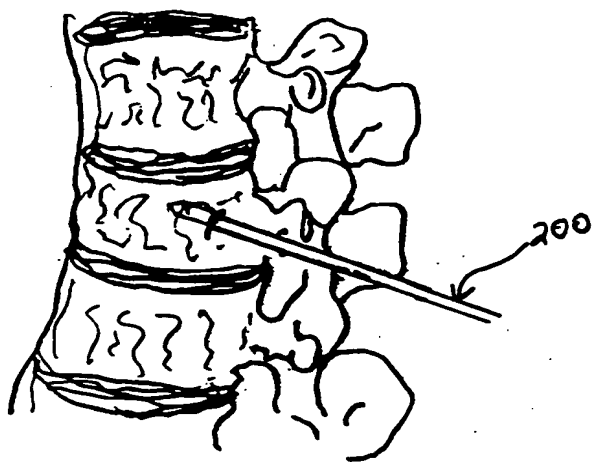
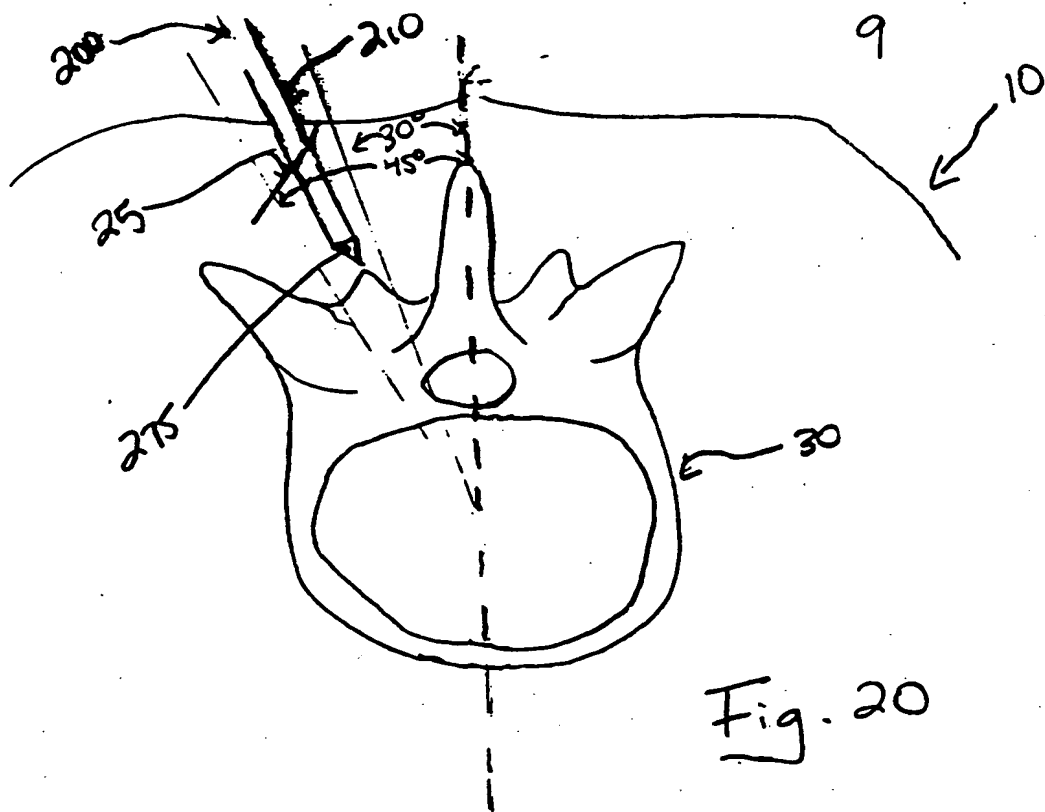


Fig. 22

10

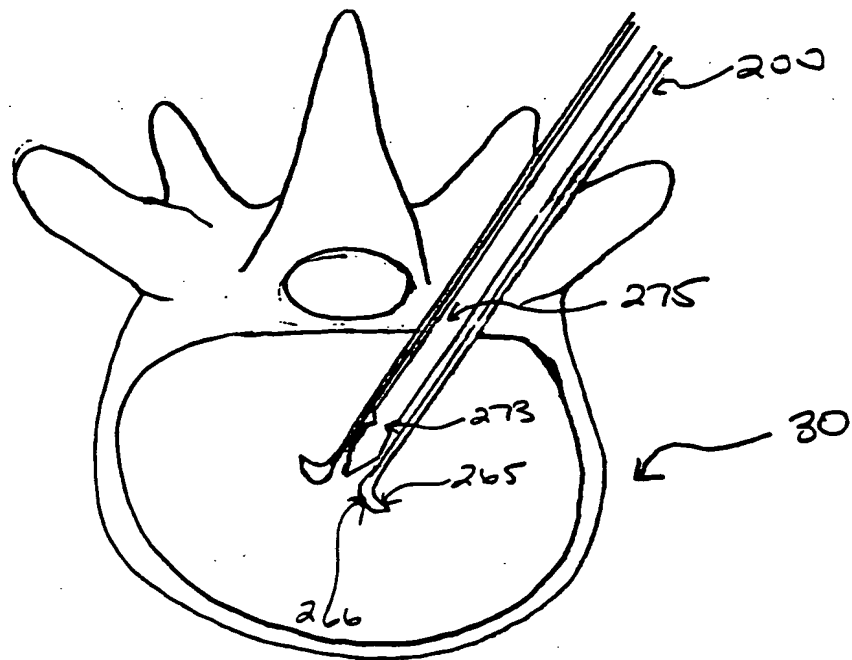


Fig. 23

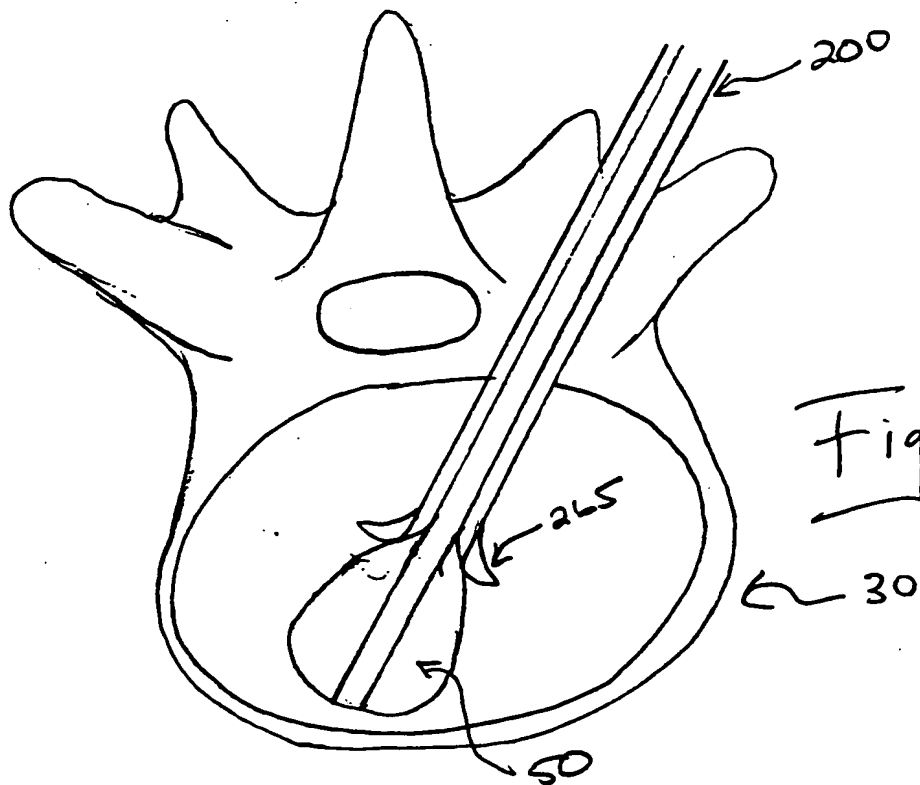


Fig. 2-1

11

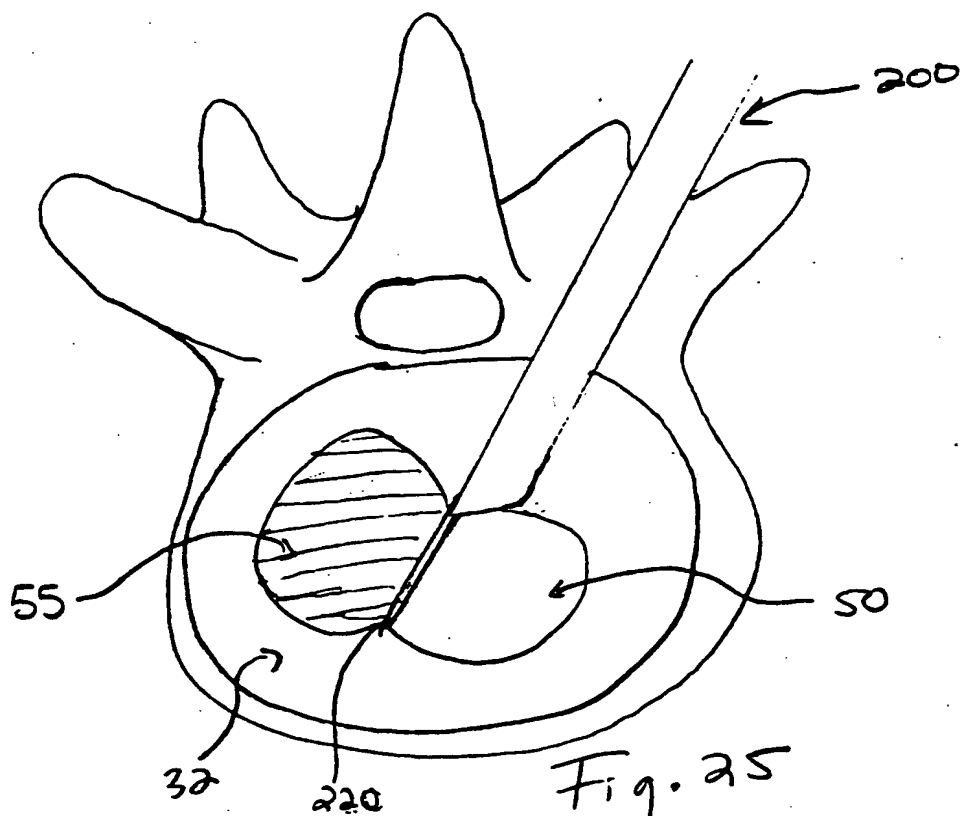
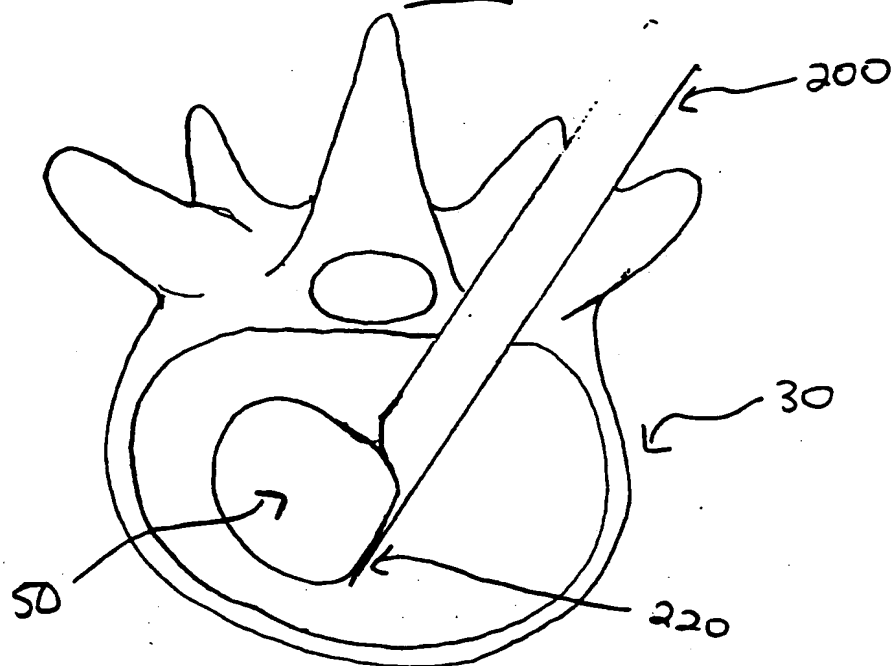


Fig. 2-5

Fig. 26 12

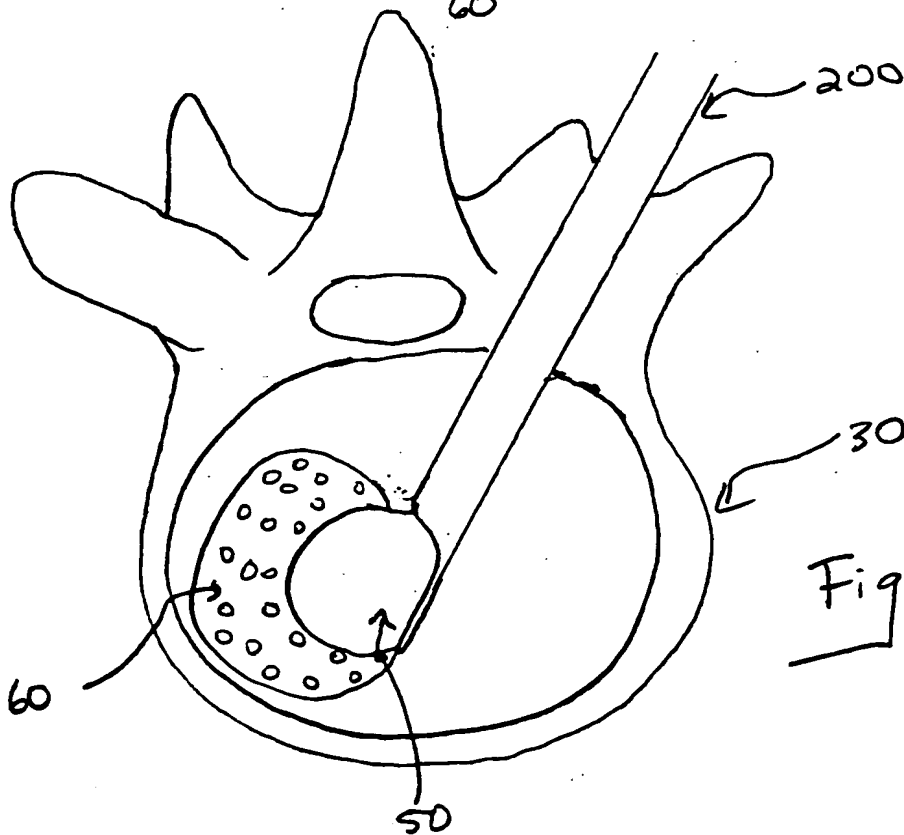
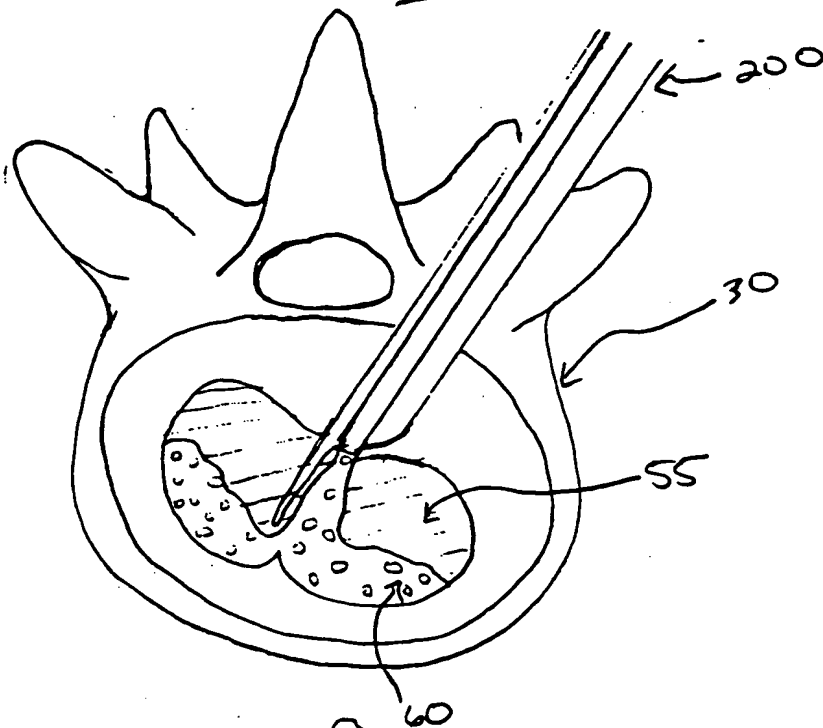
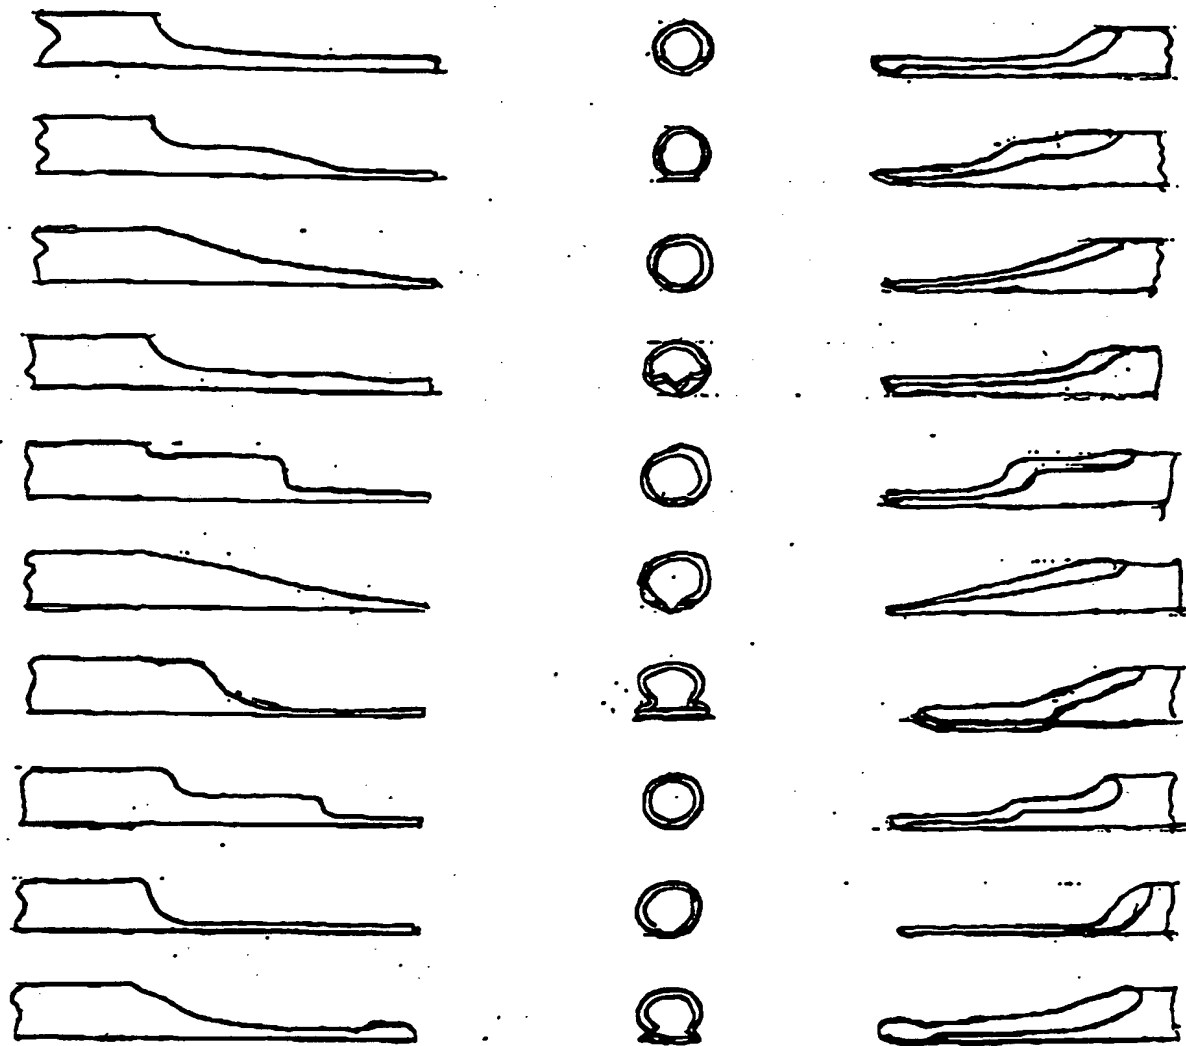
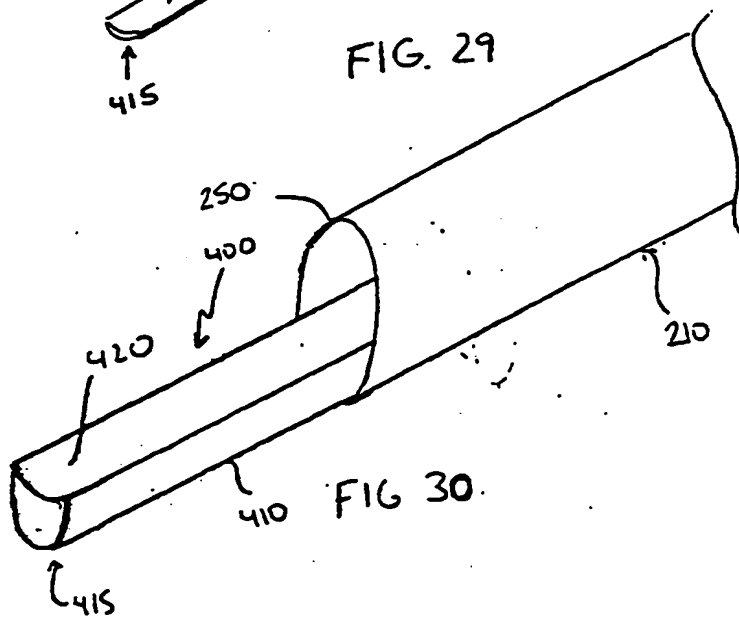
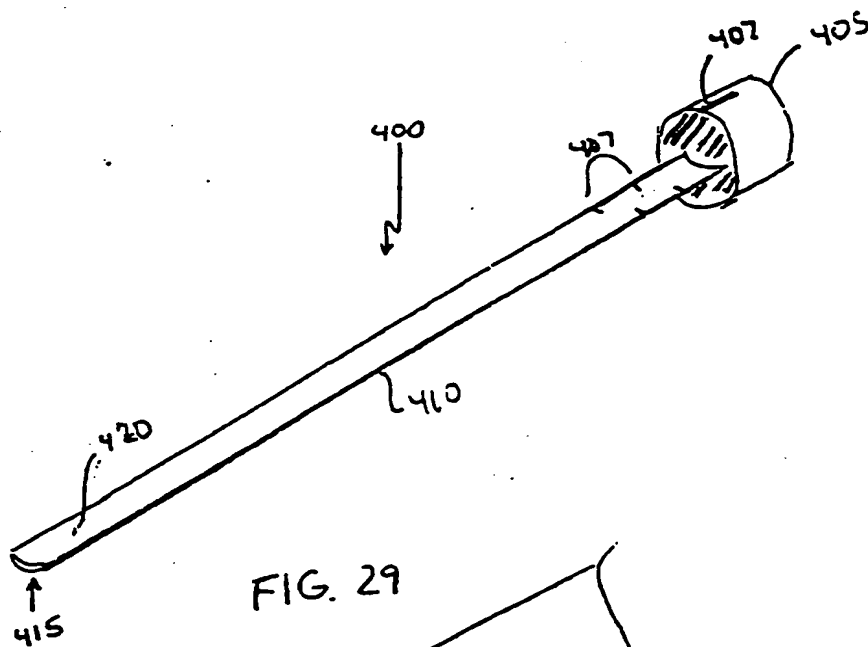


Fig. 27

Fig. 28



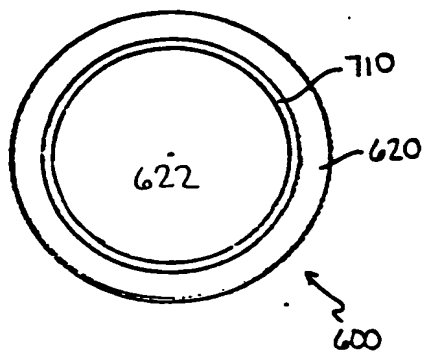


FIG 32




FIG 31

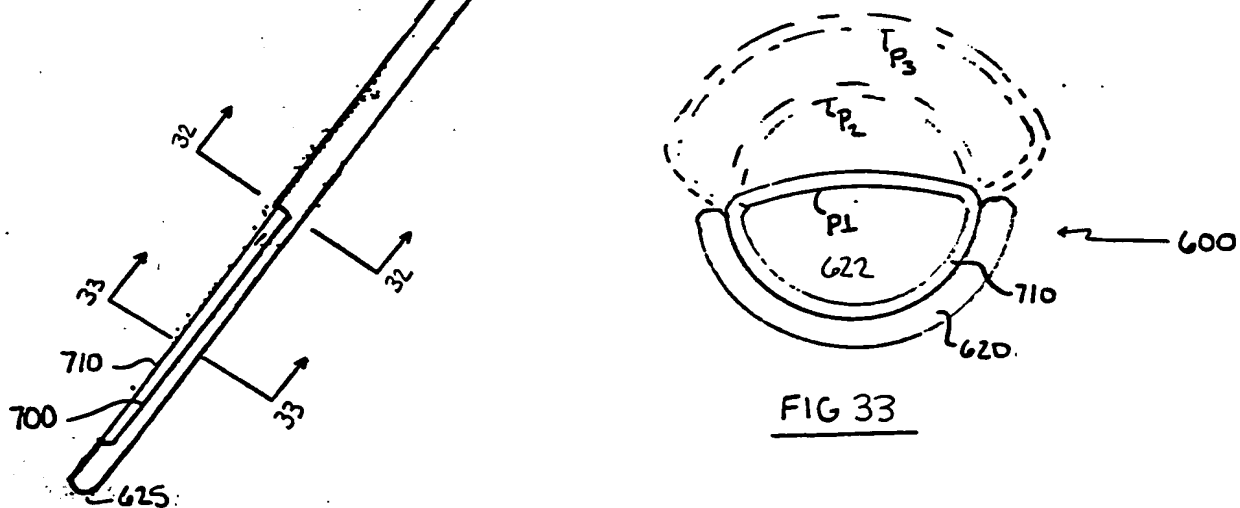


FIG 33

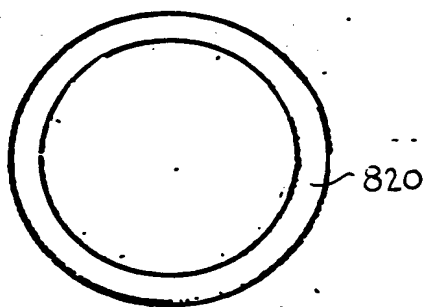


FIG 35

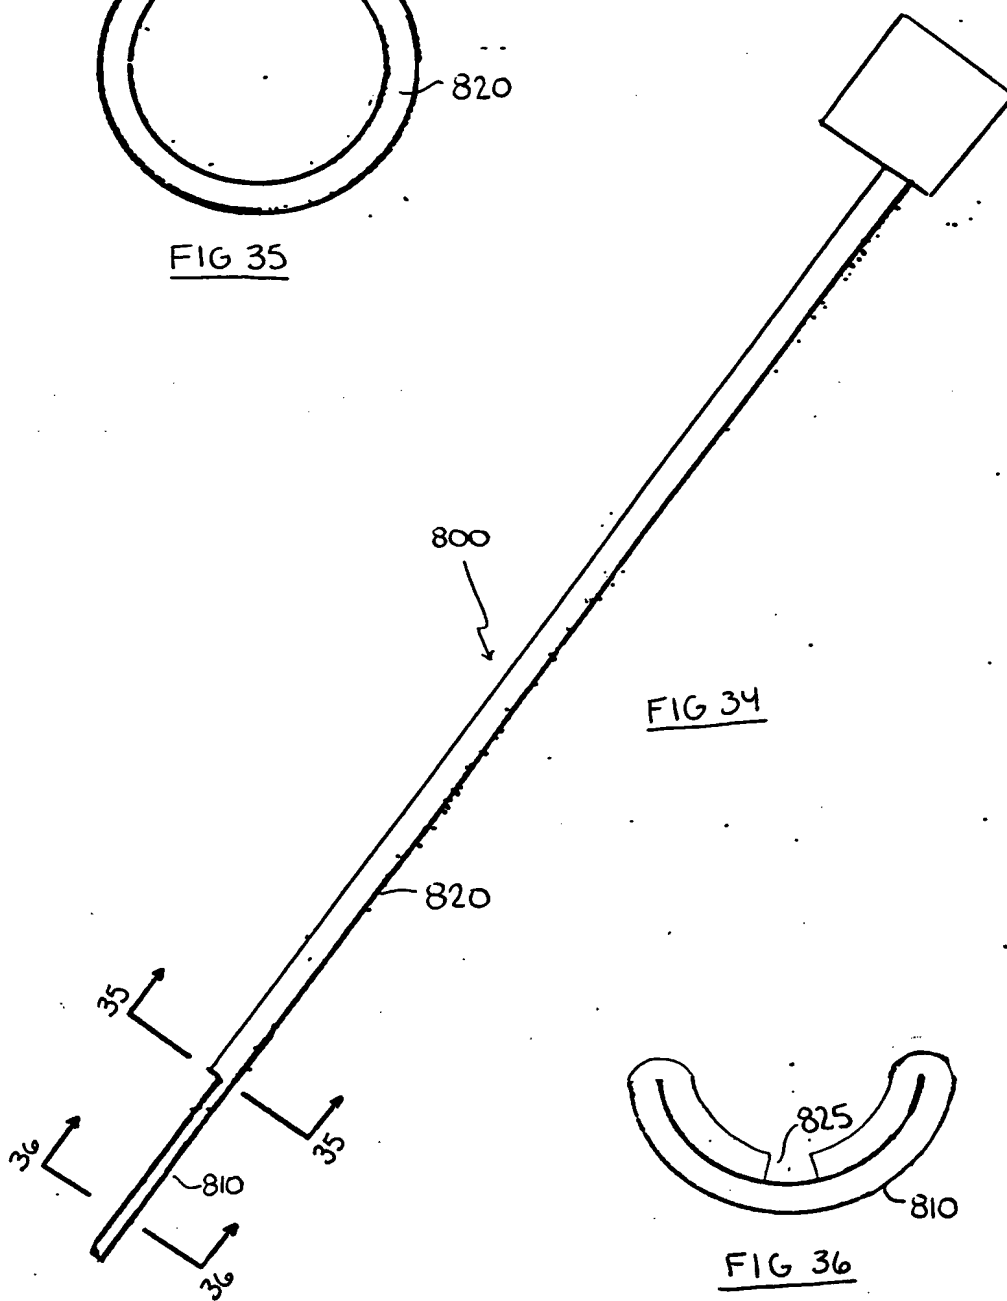


FIG 34




FIG 36



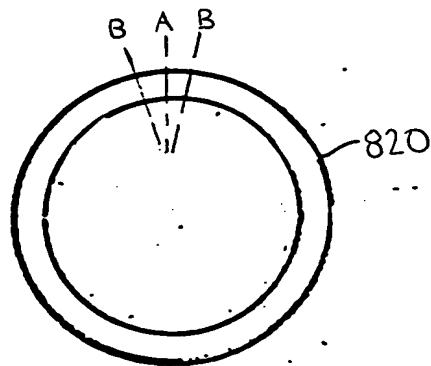


FIG 37

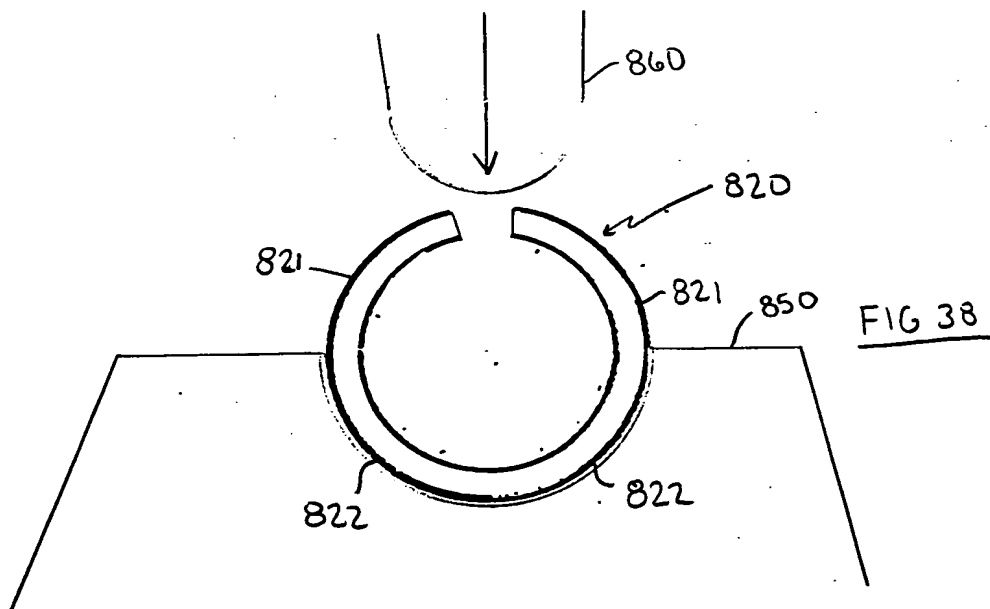


FIG 38

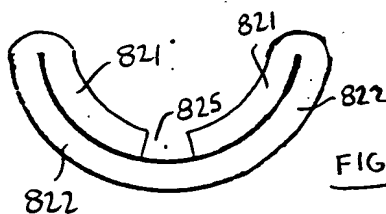


FIG 39